

Aluminium Bi-Fold Door Order



Customer Name: _____ Your Reference: _____

Tel No: _____ Date Requested: _____

Fax No: _____

Please email to : info@alumate.co.uk

Or

Fax to: 01443 523544

Main Colour:

- White / White
- Anthracite Grey / Anthracite Grey
- Light Grey / Light Grey
- Black / Black
- Brown / Brown
- Anthracite Grey / White
- Black / White
- Other.....

Hinge Colour:

- Black (recommended on all colours)
- White
- Silver

Shootbolt T – Handle:

- Black
- White
- Silver
- Chrome (note: cost addition)

Traffic Door Handle Colour (where fitted):

- Black
- White
- Silver
- Chrome (note: cost addition)

Trickle Vent Required in 40mm Head Add-On:

- Trickle Vent(s) in Head Add-On No.....

Opening:

- Open Out
- Open In (Note: less weather proof)

Cill:

- None
- 95mm
- 150mm
- 177mm
- 190mm

Note: 25mm Deduction

Drainage:

- Concealed
- Face
- No Drainage

Glazing Options:

- Toughened A Rated Spec Glass
- Toughened C Rated Spec Glass
- Unglazed
- Glass to _____


A Rated Spec—softcoat+ warmedge black argon

C Rated Spec—softcoat+ silver spacer


Low Threshold:

- 34mm (Reduced Weather Proofing)
- 22mm (Internal Use Only)

Dimensions and configuration:

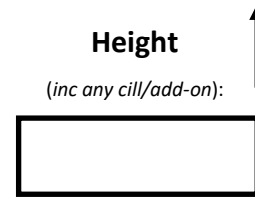


Width

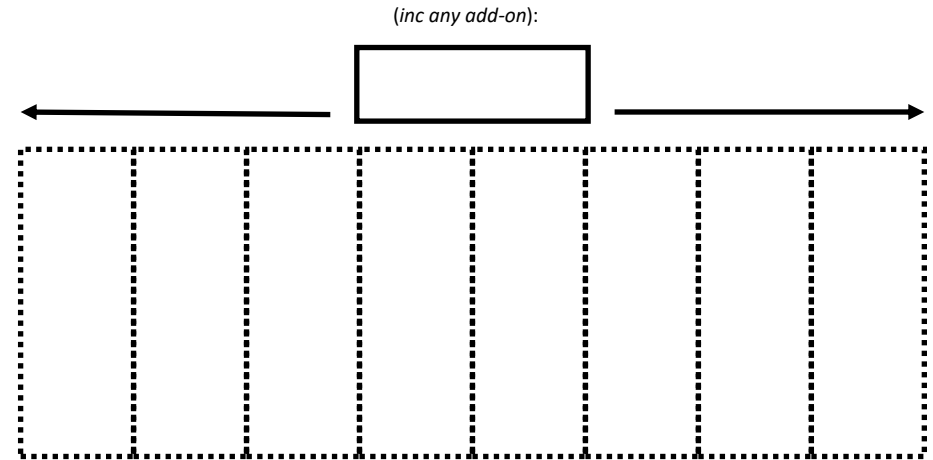

When viewed from outside

= Leaf Opening Direction

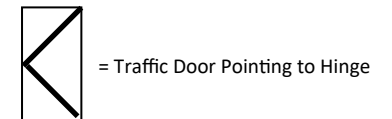

Points to note:

- * Min Sash Width: 650mm
- * Max Sash Width: 1200mm wide (Leaf height and wind loading dependant)
- * Max Sash Height: 3000mm (not recommended over 2400mm)
- * **An even number of leaves all opening in one direction will not have external access when closed (no traffic door)**
- * Black hinges recommended on all colours due to black inter-leaf gasket
- * Assistance is needed on-site to aid delivery driver unloading products